

DOUBLE TWIST WRAPPER WITH ALIGNER FEEDER – TWO4

FOR THE AUTOMATIC SORTING, FEEDING AND WRAPPING IN DOUBLE TWIST STYLE.


The Double Twist wrapper with Aligner feeder machine has a wrapping speed of up to 330 pieces per minute. The aligner feeder will sort products into a single file before feeding them into the wrapping section.

The machine consists of: Double paper feed reel holder for inner wrap, or speedy changeover of reels. Air assisted paper feed system. The feed belt runs in continuous motions and has a sensor to control low & high feed control – this will automatically control the product feed to the in-feed belt. Low product will put the machine in standby mode, showing a flashing beacon so the operators are aware the machine is in standby, as product commences the machine will automatically start.

Wrapping film length is changed by a keypad and stepper motor. The machine has a fully self-contained lubrication system. Lexan clear guards are electrically interlocked by magnetic safety switches so that the machine will automatically stop if the guarding is opened whilst the machine is running. Suitable for flat bottom articles such as jellies; fudges, enrobed & moulded products, fondants etc.

FEATURES

- Wrapping Speed: 330 Pcs/min
- Product Dims: (L)16-40mm (W)12-30mm (H)6-20mm
- Double paper feed reel holder for inner wrap facilitates speedy changeover of reels.
- Continuous motion feed belt with sensor for low & high feed control, automatically adjusting product feed.
- Low product triggers standby mode with flashing beacon alert
- Suitable for wrapping flat bottom articles e.g. jellies fudges, enrobed and moulded products, fondants etc.

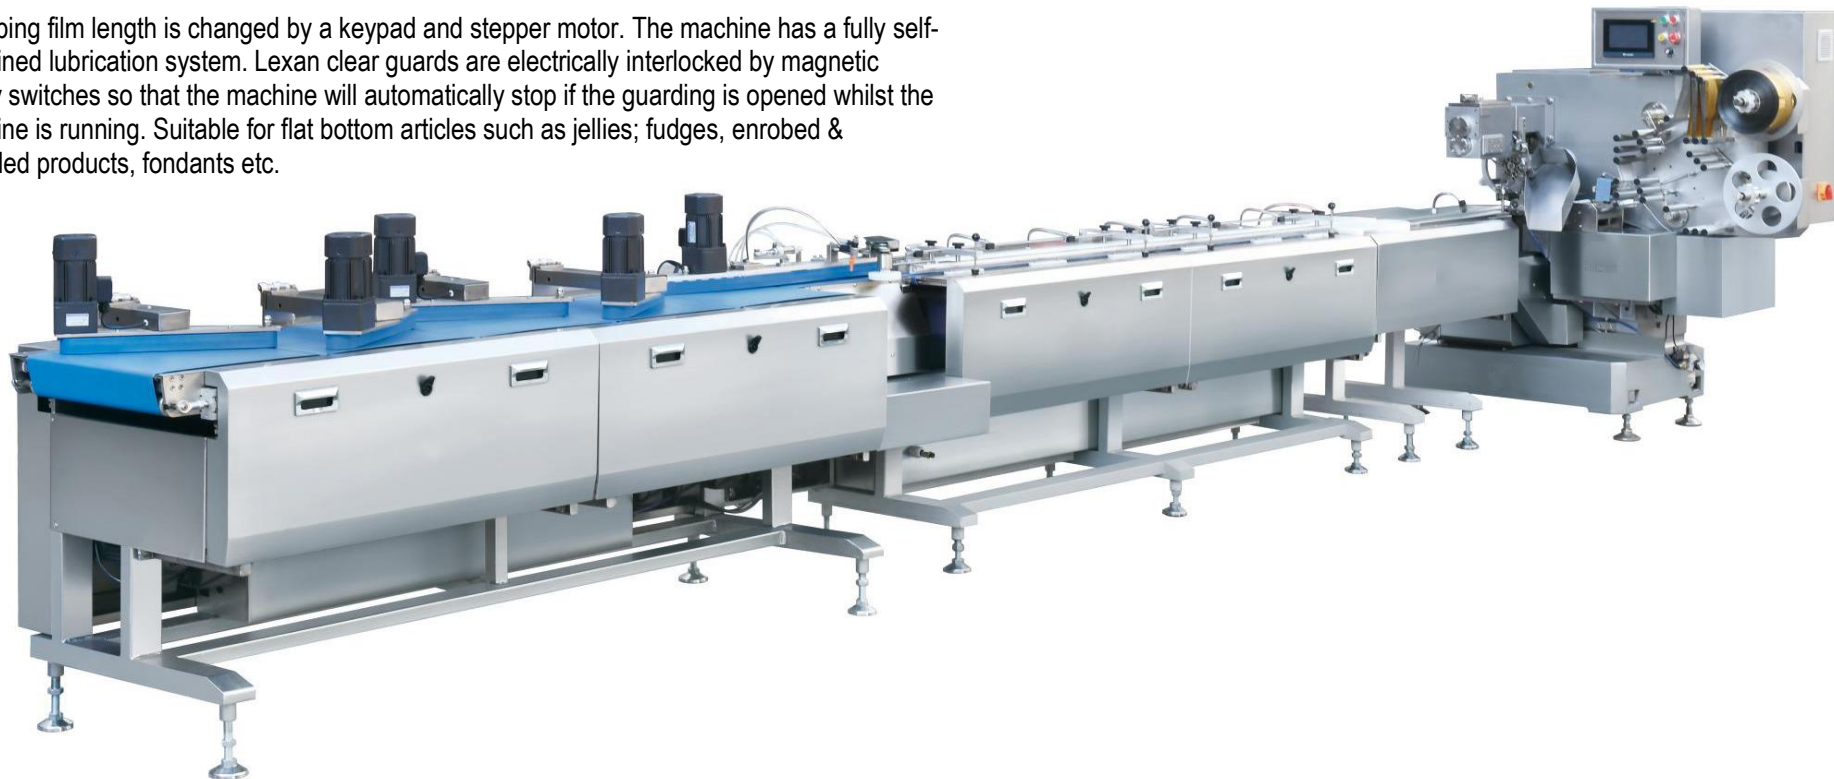

WRAPPING EQUIPMENT



DOUBLE TWIST WRAPPER WITH ALIGNER FEEDER - TW04

SPECIFICATIONS

Dimensions: (L)7240mm x (W)752mm x (H)1525mm

Wrapping Material: cellophane, waxed paper, PVC, PET, etc

Power: 13Kw

Weight: 2300kg

Material: 304 Stainless Steel with contact parts food grade materials

Wrapping Speed: 330pcs/minute

